

GEHL

SKID LOADERS



GEHL[®]
WORKS LIKE YOU[™]



**BORN ON AN
AMERICAN FARM
IN 1859.**

GEHL[®]

WORKS LIKE YOU[™]

Starting in 1859 GEHL has been rooted in agriculture. Designing and building machines to help America's hardest workers. Many years later, we are offering products world-wide that work just as hard as the people who own and operate them.

We build machines that make life easier and exceed expectations. Here at GEHL we know that true satisfaction isn't felt while earth-moving but looking back at a job well-done. That is the true payoff for our operators and built in our DNA at GEHL.

For over 160 years we have been partnering with farmers, construction crews, landscapers and rental companies – large and small – to help move mountains and build a strong foundation of trust. **We care about our operators.** Safety and efficiency go into every machine we produce to help hardworking people get home safe and maybe even a little bit early. ■

The true payoff comes in a job well-done.



GEHL

**RAISED ON
A GLOBAL
JOB SITE.**

We have always designed and built machines to help the needs of the people who change our landscape. Over time, regulations and the needs of these workers change. GEHL continues to innovate and change with them to supply the most robust durable machines on the market.

Humble and hard working people, responsible for molding and changing the world around us are not overlooked by our brand. With that in mind, GEHL has contributed heavily to the construction industry and is dedicated to continue for many years to come.

GEHL has invested significantly into the future of our products and will continue to change and meet the requirements of urban job sites. Driven by the voice of our customers and industry data we are committed to be here to design, build, service and stand behind our products. We will help you do the heavy lifting.

As the global landscape changes we stay on track supplying machines that are reliable and meet or exceed emissions standards for the future of our planet and our young operators of tomorrow. ■

SKID LOADERS



NEW!
R190 GEN-2

Height to Hinge Pin-Fully Raised
- 3023mm | 119"
Rated Operating Capacity
- 862kg | 1,900lbs

RADIAL LIFT

Compact
H - 1.9m / W - 1.6m / L - 2.4m
Largest Radial Lift Loader
Powerful Lifting
Operator Must-Have



1640e

Height to Hinge Pin-Fully Raised
- 2438mm | 96"
Rated Operating Capacity
- 386kg | 851lbs

RADIAL LIFT

Ultra Compact
H - 1.9m / W - .9m / L - 2.6m
Fits in Tight Spaces
Easy to Transport



NEW!
V210

Height to Hinge Pin-Fully Raised
- 3061mm | 120.5"
Rated Operating Capacity at 50%
- 952kg | 2,100lbs

VERTICAL LIFT

Mid-Size Loader
H - 2m / W - 1.6m / L - 3.5m
Pilot Joystick Controls
Expanded Lift Height



R105

Height to Hinge Pin-Fully Raised
- 2743mm | 108"
Rated Operating Capacity
- 476kg | 1,050lbs

RADIAL LIFT

Ultra Compact
H - 1.8m / W - 1.2m / L - 2.3m
Perfect Rental Machine
Easy to Transport



NEW!
V230

Height to Hinge Pin-Fully Raised
- 3086mm | 121.5"
Rated Operating Capacity at 50%
- 1043kg | 2,300lbs

VERTICAL LIFT

Mid-Size Loader
H - 2m / W - 1.7m / L - 3.6m
Great for Construction
Manufacturer's Favorite



R135

Height to Hinge Pin-Fully Raised
- 2794mm | 110"
Rated Operating Capacity
- 612kg | 1,350lbs

RADIAL LIFT

Compact
H - 1.9m / W - 1.4m / L - 2.3m
Pilot Joystick Controls
Great for Rental
Easy to Transport



NEW!
V275

Height to Hinge Pin-Fully Raised
- 3277mm | 129"
Rated Operating Capacity
- 1247kg | 2,750lbs

VERTICAL LIFT

Mid-Size Loader
H - 2.07m / W - 1.7m / L - 3.8m
Joystick Controls Standard
Powerful Design



R165

Height to Hinge Pin-Fully Raised
- 3018mm | 118.5"
Rated Operating Capacity
- 748kg | 1,650lbs

RADIAL LIFT

Compact
H - 1.96m / W - 1.6m / L - 2.4m
Optional Pilot Joystick Controls
Wicked Speed
Operator Favorite



V330

Height to Hinge Pin-Fully Raised
- 3327mm | 131"
Rated Operating Capacity
- 1497kg | 3,300lbs

VERTICAL LIFT

Large Loader
H - 2.1m / W - 1.8m / L - 3.02m
Largest Skid Loader Capacity
Highest Dumping Height

KEEPING YOU ROLLIN'

VISIBILITY

Excellent sightlines from all sides for safe and precise placement of loads and reduced jobsite incidents. A high-mounted seat provides an excellent vantage point to the attachment and cutting-edge. Sloped lift arms provide additional visibility to the ground.*

**V210, V230 and V275 only*

LEVEL II ROPS/FOPS

Provides the highest level of safety protection for an operator in a roll over or falling object situation.* Sloped roof maximizes visibility when dumping into trucks and trailers.**

**V210, V230 and V275 optional with additional bracket*

***V210, V230 and V275 only*

SAFETY

Our heavy duty doors offer operator protection, easy entry/exit and are well sealed for maximum operator climate controlled comfort. Add AC/Heat and you'll feel the difference and never go back.

NEW!

CLIMATE CONTROL

Upgrade to Pressurized Cab Enclosure with air conditioning and heat to utilize the most of your machine. No matter the weather, you'll be running comfortably. Optional air ride seat and Bluetooth radio are two additions that help any operator with long hours of operation.

GEHL MODEL NUMBERS

Easy to understand; add a "0" after any model number to give you the rated operating capacity in pounds. Example: V230 = Radial skid loader with 2,300 lbs. rated operating capacity.

MAINTENANCE

Excellent service access and quality components pair up to provide durable machines that are easy to maintain.

REAR BUMPER

The rear bumper protects the rear of the machine from accidental damage and increases the rated operating capacity.*

**Increases capacity on V210, R105, R135, R165*

IdealAccess® - INDUSTRY EXCLUSIVE

A proprietary feature of the Pilot Series skid loaders is the IdealAccess® fold-up door. The optional fold-up door design provides an overall machine operating height that is several inches lower than machines with over-head door systems. It's unique in the fact that it folds up and everything stays in front of the operator, providing more overhead room free of obstructions. Available on V210, V230 + V275

TRUE HYDRAULIC POWER

Hydraulic hoses and cushioned cylinders designed and built to be well-protected from wear and hidden away from sight to help prolong life and keep your investment running strong.

ATTACHMENTS

A full line of attachments and accessories are designed specifically to fill operators' needs, making their GEHL the most versatile machine on the job site. Some popular attachments that transform your machines in minutes are: Augers, Backhoes, Bale Clamps/Spears, Brooms, Mowers, High Dump Buckets, Grapples, and Pallet Forks, to name a few. Upgrade to hydraulic Power-A-Tach® to change and secure new attachments without leaving the comfort of your cab.

SERVICE

Easy access to the chain case makes maintenance and repairs much faster getting you back on the job site or in the fields with minimal down time to your machine. Greasable pins make daily maintenance a breeze.*

**V210, V230 and V275 only*

NEW MODELS

V210 | V230 | V275

- 23% More Cab Volume
- Over 20% Increased Visibility
- Easy Entrance Lowered 76mm
- Increased Ground Speeds
- Re-Imagined Serviceability

LET'S GET INSIDE

WE UNDERSTAND THE CAB IS YOUR OFFICE.

We offer many standard and optional features to improve operator comfort and know the importance of being comfortable while working. Not only for operator fatigue but also for overall job site safety and employee retention. A comfortable and alert operator is a safe operator. Please consider these well-thought-out features and the benefits your crew will have when building your next loader.

PRESSURIZED CAB

An optional pressurized, sealed cab enclosure provides a cleaner, quieter operating environment.

POWER PORT

12-volt accessory plug keeps your devices fully charged. USB Port also available on V210, V230 and V275.



INTERIOR LIGHTS

We know our operators start at dawn and work past dusk, so we have interior lights and optional additional work lights to fit your needs.

EXCELLENT VIEWS FROM ALL SIDES

Safe, clear visibility for precise operation. Rear window is removable for alternative exit in emergencies.

OVER 20% INCREASED VISIBILITY on V210, V230 + V275

51 MM (2") SEATBELT

Optional 76 mm (3") seatbelt available.

CONTROL OPTIONS

Hand/Foot, T-Bar, Dual-hand or Joystick available on selected models.*

**Not available on all models*



DUAL-HAND



T-BAR



HAND/FOOT



JOYSTICK

ADJUSTABLE CONTROLS

Controls extend and retract to provide personalized comfort.

SPACIOUS COMFORT

Keeping you comfortable after a long day and some models have easy removable foot plate or easy cleaning of the cabin floor.

23% LARGER CABS on V210, V230 + V275



BEST IN CLASS - STANDARD ROPS II OVERHEAD PROTECTION

Standard on R105, R135, R165 and V330. Optional on V210, V230 and V275.

MULTIPLE AIR VENTS

Adjustable vents throughout the cab provide optimal temperature control.

HEAVY-DUTY SIDE PROTECTION

Sliding windows open for venting and communicating while still protected by single piece metal guarding.

EASY ENTRY AND EXIT

Large entry area allows for easy access to the operator station.

BLUETOOTH MP3 RADIO

Optional upgrade to wirelessly play music or podcasts using the speakers in the cab.

ADJUSTABLE SEAT

Choose between an air-ride suspension or mechanical suspension seat.

NEW BRANDED, CLOTH SEAT available on V210, V230 + V275

PADDED, ADJUSTABLE ARMRESTS

OPERATOR SAFETY

The machine safety system (Hydraloc™) allows operation only when the user is on the seat and the restraint bar is lowered into position.

CUP HOLDER

CLIMATE CONTROL

Heat is standard on all cab models. Air conditioning is an option on select models.

STORAGE COMPARTMENTS

Designed for your phone, keys and other items you need within arms reach.

VISIBILITY + SAFETY

Every machine we manufacture is inspired by safety—from a more comfortable cab that reduces operator fatigue to a pressure-sensitive seat that only works when a user sits with the restraint bar lowered. Clear visibility from all sides of the machine allow for precision operation that raises productivity and minimizes accidents. We also designed our Skid Loaders with heavy-duty

doors and the highest level of safety protection for an operator in a roll over or falling object situation with industry leading Level II Falling Object Protective Structure (FOPS) and Roll-Over Protective Structure (ROPS)*. At the end of the day, nothing is more important than ensuring you get home safe after leaving the jobsite.

**Optional Feature on V210, V230 and V275*

VERTICAL OR RADIAL?

Depending on your needs and situation, we offer both radial lift and vertical lift Skid Loaders. Our radial lift loaders offer extended reach at the middle of the lift path and are designed for easier, more accessible on-site serviceability. Our

vertical lift loaders provide more reach at full lift height, making them optimal for applications that require loading and stacking at high heights. Plus, you can increase the lift capacity of a vertical lift loader by keeping the load closer to the machine.

ADDITIONAL FEATURES ON OUR V210, V230 + V275 MODELS

REAR VIEW CAMERA

This optional feature improves visibility and increases the safety of those around you while operating.



LARGER CABS

Cabin space has been increased by 23% allowing you to be even more comfortable all day long.

NEW DIGITAL DISPLAY

Check fuel consumption, engine RPM's, machine hours, engine diagnostic codes, warning indicators and much more. Additionally, you can now start your engine with keyless entry.



EASY ENTRANCE

The entrance of our cabs have been lowered 3", allowing you more space for efficient entry and exit.

KEEP YOUR PROJECT ROLLING

Skid loaders are usually the first of the machines to show up at a new build. The perfect machine for earthmoving, land prep and concrete flatwork. Get behind the controls of a GEHL skid loader at your local dealer and you'll feel the difference.



Scan with your phone
to find your local dealer.

www.gehl.com/en-US/store-locator





1640

Capacities	Metric	Imperial
Rated Operating Capacity	386 kg	851 lb
Unladen weight	1352 kg	2981 lb
Weight and dimensions		
Overall Operating Height - Fully Raised	3167 mm	125 in
Height to Hinge Pin - Fully Raised	2438 mm	96 in
Overall Height to Top of ROPS	1897 mm	75 in
Dump angle at full height	46 °	46 °
Dump height	1836 mm	72 in
Overall length with bucket	2576 mm	101 in
Dump reach - Full height	376 mm	15 in
Rollback at ground	30 °	30 °
Seat to ground height	879 mm	35 in
Wheelbase	775 mm	31 in
Overall width less bucket	909 mm	36 in
Bucket Width	914 mm	36 in
Ground clearance	150 mm	6 in
Overall length - Less Bucket	1905 mm	75 in
Clearance Radius - Front with Bucket	1473 mm	58 in
Clearance Circle - Front without Bucket	833 mm	33 in
Clearance Circle - Rear	1097 mm	43 in
Performances		
Travel speed (unladen)	8.90 km/h	6 mph
Wheels		
Standard tires	8.70 x 12	8.70 x 12
Engine		
Engine brand	Yanmar	Yanmar
Engine model	3TNV82A-BPMSR Stage V Compliant	3TNV82A-BPMSR Stage V Compliant
Engine norm	Stage V	Stage V
Gross Power (kW)	18.10 kW	24.3 hp
Net Power (kW)	17.90 kW	24 hp
Max. torque / Engine rotation	86 Nm / 2400 rpm	63 ft/lbs / 2400 rpm
Battery	12 V	12 V
Starter (kW)	1.70 kW	2.3 hp
Hydraulics		
Standard flow - Auxiliary hydraulics	38.20 l/min	10 US gpm
Tank capacities		
Fuel tank	29 l	8 US gal
Reservoir Capacity Hydraulics	27.30 l	7 US gal
Displacement	1.30 l	0.34 US gal



BUCKET WIDTH 914mm

1.9m

1.9m LENGTH WITHOUT BUCKET

2.58m

This ultra-compact skid loader carries its weight on the jobsite. The smallest skid loader manufactured by GEHL. It's easy to transport and tow and it will quickly get you a return on your investment. Also, great to grow your rental fleet and equip the DIY weekend warrior. Small in size but built tough and job-tested for years by GEHL customers. You can trust the 1640E to be your reliable co-worker rain or shine.

CONTROL TYPES

OPTIONAL



T-BAR

386 kg
OPERATING CAPACITY
[AT 50% TIPPING LOAD]

2.4 m
HEIGHT TO HINGE PIN
[FULLY RAISED]



R105



CONTROL TYPES

OPTIONAL



T-BAR



HAND/FOOT

Experience versatility with the R105, an ultra-compact Skid Loader that easily navigates tight spaces to handle the real-world demands tough operators like you face on a daily basis. Built to get work done on any terrain and in any condition, this nimble machine is compatible with our wide variety of Skid Loader attachments—adapting to whatever challenges are waiting on your to-do list. A whole lotta machine in a small package, the R105 is perfect for those looking to transform their property or business operations with a multi-purpose workhorse.

467 kg
OPERATING CAPACITY
[AT 50% TIPPING LOAD]

1.8 m
OVERALL HEIGHT
[1.24 M WIDE WITHOUT BUCKET]



Capacities	Metric	Imperial
Rated Operating Capacity	476 kg	1050 lb
Rated Operating Capacity with Optional Counterweight	533 kg	1175 lb
Unladen weight	1905 kg	4200 lb
Weight and dimensions		
Overall Operating Height - Fully Raised	3607 mm	142 in
Height to Hinge Pin - Fully Raised	2731 mm	108 in
Overall Height to Top of ROPS	1784 mm	70 in
Dump angle at full height	40 °	40 °
Dump height	2083 mm	82 in
Overall length with bucket	2997 mm	118 in
Dump reach - Full height	641 mm	25 in
Rollback at ground	31 °	31 °
Seat to ground height	826 mm	33 in
Wheelbase	876 mm	34 in
Overall width less bucket	1232 mm	49 in
Bucket Width	1372 mm	54 in
Ground clearance	159 mm	6 in
Overall length - Less Bucket	2248 mm	89 in
Clearance Radius - Front with Bucket	1829 mm	72 in
Clearance Circle - Front without Bucket	1067 mm	42 in
Clearance Circle - Rear	1372 mm	54 in
Performances		
Travel speed (unladen)	8.26 km/h	5 mph
Wheels		
Standard tires	27x8.5x15 HD	27x8.5x15 HD
Engine		
Engine brand	Yanmar	Yanmar
Engine model	3TNV88C-KMSV Stage V	3TNV88C-KMSV Stage V
Engine norm	Stage V	Stage V
Gross Power (kW)	25.50 kW	34.2 hp
Net Power (kW)	23.70 kW	31.78 hp
Max. torque / Engine rotation	109.40 Nm / 1820 rpm	81 ft/lbs / 1820 rpm
Battery	12 V	12 V
Starter (kW)	2.30 kW	3.08 hp
Hydraulics		
Standard flow - Auxiliary hydraulics	55 l/min	15 US gpm
Tank capacities		
Fuel tank	43.18 l	11 US gal
Reservoir Capacity Hydraulics	30.30 l	8 US gal
Displacement	1.64 l	0.43 US gal
Noise and vibration		
Environmental noise (LwA)	101 dB	101 dB
Whole-Body Vibration (ISO 2631-1)	1.12 m/s ²	1.12 m/s ²
Vibration to whole hand/arm	< 1.70 m/s ²	< 1.70 m/s ²



Capacities	Metric	Imperial
Rated Operating Capacity	612 kg	1350 lb
Rated Operating Capacity with Optional Counterweight	680 kg	1499 lb
Unladen weight	2383.62 kg	5255 lb
Weight and dimensions		
Overall Operating Height - Fully Raised	3670.30 mm	144 in
Height to Hinge Pin - Fully Raised	2790 mm	110 in
Overall Height to Top of ROPS	1930 mm	76 in
Dump angle at full height	40 °	40 °
Dump height	2120 mm	83 in
Overall length with bucket	3073.40 mm	121 in
Dump reach - Full height	591 mm	23 in
Rollback at ground	28 °	28 °
Seat to ground height	871.22 mm	34 in
Wheelbase	950 mm	37 in
Overall width less bucket	1364 mm	54 in
Bucket Width	1372 mm	54 in
Ground clearance	201 mm	8 in
Overall length - Less Bucket	2359.66 mm	93 in
Clearance Radius - Front with Bucket	1842 mm	73 in
Clearance Circle - Front without Bucket	1120 mm	44 in
Clearance Circle - Rear	1372 mm	54 in
Performances		
Travel speed (unladen)	12.90 km/h	8 mph
Wheels		
Standard tires	10.00x16.5 HD	10.00x16.5 HD
Engine		
Engine brand	Yanmar	Yanmar
Engine model	4TNV88C	4TNV88C
Engine norm	Stage IV / Tier 4 Final	Stage IV / Tier 4 Final
Gross Power (kW)	34.30 kW	46 hp
Net Power (kW)	33.20 kW	44.5 hp
Max. torque / Engine rotation	146.20 Nm / 1820 rpm	108 ft/lbs / 1820 rpm
Battery	12 V	
Starter (kW)	2.30 kW	3.08 hp
Hydraulics		
Standard flow - Auxiliary hydraulics	63.60 l/min	17 US gpm
Tank capacities		
Fuel tank	59.40 l	16 US gal
Displacement	2.19 l	0.58 US gal
Noise and vibration		
Environmental noise (LwA)	101 dB	101 dB
Whole-Body Vibration (ISO 2631-1)	0.81 m/s ²	0.81 m/s ²
Vibration to whole hand/arm	< 1.77 m/s ²	< 1.77 m/s ²



Born through the challenges of farm work but built for success everywhere else, the compact R135 GEN:2 delivers extra lifting capacity for those who need a nimble yet strong Skid Loader. Featuring power where it matters, this machine easily navigates through narrow gates and is more manageable during transport—getting you to wherever work needs doing, without causing a commotion. This new version of the R135 is packed with intuitive controls and designed for comfort, helping reduce operator fatigue during long days on the job. Low-effort controls make difficult jobs a cinch, and an air-ride seat along with other optional features means you'll go home at the end of a tough day without feeling like you've been hit by a ton of bricks.

CONTROL TYPES

OPTIONAL



T-BAR



HAND/FOOT



JOYSTICK

612 kg
OPERATING CAPACITY
[AT 50% TIPPING LOAD]

2.79 m
HEIGHT TO HINGE PIN
[FULLY RAISED]



R165

CONTROL TYPES

OPTIONAL



T-BAR



HAND/FOOT



JOYSTICK

748 kg
OPERATING CAPACITY
[AT 50% TIPPING LOAD]

1.58 m
OVERALL WIDTH
[LESS BUCKET]

When it's time to get a high-performance and versatile solution for your agricultural and construction operations choose the R165. A true crowd favorite. Compact body style with true raw power. With perfect all-terrain maneuverability, this machine is ideal for your most demanding applications in confined spaces and on uneven ground. Combining driving comfort, precision of movement, multifunction use (thanks to endless attachments available).



Capacities	Metric	Imperial
Rated Operating Capacity	748 kg	1650 lb
Rated Operating Capacity with Optional Counterweight	816.50 kg	1800 lb
Unladen weight	2796 kg	6164 lb
Weight and dimensions		
Overall Operating Height - Fully Raised	3876 mm	153 in
Height to Hinge Pin - Fully Raised	3009.90 mm	118 in
Overall Height to Top of ROPS	1955.80 mm	77 in
Dump angle at full height	38 °	38 °
Dump height	2379 mm	94 in
Overall length with bucket	3101 mm	122 in
Dump reach - Full height	579 mm	23 in
Rollback at ground	28 °	28 °
Seat to ground height	904 mm	36 in
Wheelbase	986 mm	39 in
Overall width less bucket	1580 mm	62 in
Bucket Width	1562 mm	61 in
Ground clearance	160 mm	6 in
Overall length - Less Bucket	2385 mm	94 in
Departure angle	21 °	21 °
Clearance Radius - Front with Bucket	1869 mm	74 in
Clearance Circle - Front without Bucket	1153 mm	45 in
Clearance Circle - Rear	1466 mm	58 in
Performances		
Travel Speed with Two-Speed Option - Maximum	19.50 km/h	12 mph
Travel speed (unladen)	12.60 km/h	8 mph
Wheels		
Standard tires	10.00x16.5 HD	10.00x16.5 HD
Engine		
Engine brand	Yanmar	Yanmar
Engine model	4TNV98C-NMS2V	4TNV98C-NMS2V
Engine norm	Stage V	Stage V
Gross Power (kW)	51.70 kW	69.3 hp
Net Power (kW)	51 kW	68.4 hp
Max. torque / Engine rotation	241 Nm / 1625 rpm	178 ft/lbs / 1625 rpm
Battery	12 V	12 V
Starter (kW)	3 kW	4 hp
Hydraulics		
Standard flow - Auxiliary hydraulics	77 l/min	20 US gpm
High-Flow Auxiliary Hydraulics - Option	114 l/min	30 US gpm
Tank capacities		
Fuel tank	62.50 l	17 US gal
Reservoir Capacity Hydraulics	39 l	10 US gal
Displacement	3.30 l	0.87 US gal
Noise and vibration		
Environmental noise (LwA)	101 dB	101 dB
Whole-Body Vibration (ISO 2631-1)	1.05 m/s ²	1.05 m/s ²
Vibration to whole hand/arm	< 1.53 m/s ²	< 1.53 m/s ²



R190 GEN:2

Capacities	Metric	Imperial
Operating Capacity At 50% Tipping Load	861.82 kg	1900 lb
Operating Weight	3172.87 kg	6995 lb
Weight and dimensions		
Overall Operating Height - Fully Raised	3886.20 mm	153 in
Height to Hinge Pin - Fully Raised	3022.60 mm	119 in
Overall Height to top of ROPS	1955.80 mm	77 in
Dump angle at full height	38 °	38 °
Dump height	2387.60 mm	94 in
Overall length with bucket	3251.20 mm	128 in
Dump reach - Full height	584.20 mm	23 in
Rollback at ground	28 °	28 °
Rollback Angle at Full Height	99 °	99 °
Seat to ground height	904.24 mm	36 in
Wheelbase	1066.80 mm	42 in
Overall width less bucket	1574.80 mm	62 in
Bucket Width	1676.40 mm	66 in
Ground clearance	160.02 mm	6 in
Overall length - Less Bucket	2446.02 mm	96 in
Clearance Radius - Front with Bucket	2032 mm	80 in
Clearance Circle - Front without Bucket	1168.40 mm	46 in
Clearance Circle - Rear	1511.30 mm	59 in
Performances		
Travel Speed with Two-Speed Option - Maximum	19.47 km/h	12 mph
Travel speed (unladen)	12.55 km/h	8 mph
Wheels		
Standard tires	10 x 16.5	10 x 16.5
Engine		
Engine brand	Yanmar	Yanmar
Engine model	4TNV98C-NMS2V	4TNV98C-NMS2V
Engine norm	Stage IV / Tier 4 Final	Stage IV / Tier 4 Final
Gross Power (kW)	51.67 kW	69.3 hp
Net Power (kW)	51 kW	69.4 hp
Max. torque / Engine rotation	241 Nm / 1625 rpm	178 ft/lbs / 1625 rpm
Battery voltage	12 V	12 V
Starter (kW)	3 kW	4 hp
Hydraulics		
Standard flow - Auxiliary hydraulics	70.78 l/min	19 US gpm
Auxiliary Hydraulic Pressure	207 bar	3002 PSI
High-Flow Auxiliary Hydraulics - Option	113.94 l/min	30 US gpm
High-Flow Auxiliary Hydraulics Pressure - Option	200 bar	2901 PSI
Tank capacities		
Fuel tank	58.67 l	16 US gal
Reservoir Capacity Hydraulics	35.96 l	9 US gal
Noise and vibration		
Environmental noise (LwA)	100 dB	100 dB
Whole-Body Vibration (ISO 2631-1)	0.96 m/s ²	0.96 m/s ²
Vibration to whole hand/arm	< 1.53 m/s ²	< 1.53 m/s ²



Boasting 862 kg of rated operating capacity this next generation machine is not to be underestimated. Remember to consider how you'll be transporting the machine you choose because a smaller body style may play to your advantage. Visit a dealer today to get behind the controls and find the right fit for you. On a farm or jobsite daily tasks change and this machine is suitable to be your multifunctional tool that fits every job perfectly.

CONTROL TYPES

STANDARD



JOYSTICK

862 kg
OPERATING CAPACITY
[AT 50% TIPPING LOAD]


3.02 m
HEIGHT TO HINGE PIN
[FULLY RAISED]

VERTICAL LIFT



V210

Capacities	Metric	Imperial
Operating Capacity At 50% Tipping Load	952.54 kg	2100 lb
Operating Weight	3393 kg	7480 lb
Unladen weight	3045 kg	6713 lb
Tipping capacity	1905 kg	4200 lb
Weight and dimensions		
Operating Weight - Approximate	3393 kg	7480 lb
Overall Operating Height - Fully Raised	4013 mm	158 in
Height to Hinge Pin - Fully Raised	3061 mm	121 in
Overall Height to top of ROPS	2032 mm	80 in
Dump angle at full height	42°	42°
Dump height	2286 mm	90 in
Overall length with bucket	3543 mm	139 in
Dump reach - Full height	851 mm	34 in
Rollback Angle at Full Height	92°	92°
Seat to ground height	952.50 mm	37 in
Overall width less bucket	1623 mm	64 in
Ground clearance	178 mm	7 in
Overall length - Less Bucket	2743 mm	108 in
Clearance Radius - Front with Bucket	2146 mm	84 in
Clearance Circle - Rear	1664 mm	66 in
Performances		
Travel Speed with Two-Speed Option - Maximum	18.70 km/h	12 mph
Travel speed (unladen)	12.10 km/h	8 mph
Engine		
Engine brand	Yanmar	Yanmar
Engine model	4TNV98C-NGL	4TNV98C-NGL
Engine norm	Stage V	Stage V
Gross Power (kW)	52.70 kW	70.7 hp
Net Power (kW)	51.70 kW	69.3 hp
Max. torque / Engine rotation	241 Nm / 1625 rpm	178 ft/lbs / 1625 rpm
Number of cylinders	4	4
Engine cooling system	Water	Water
Battery voltage	12 V	12 V
Alternator - Ampere	100 A	100 A
Starter (kW)	3 kW	4 hp
Hydraulics		
Standard flow - Auxiliary hydraulics	86.50 l/min	23 US gpm
Auxiliary Hydraulic Pressure	239.59 bar	3475 PSI
High-Flow Auxiliary Hydraulics - Option	114 l/min	30 US gpm
High-Flow Auxiliary Hydraulics Pressure - Option	229.25 bar	3325 PSI
Tank capacities		
Fuel tank	106 l	28 US gal
Reservoir Capacity Hydraulics	22.70 l	6 US gal
Displacement	3.30 l	0.87 US gal

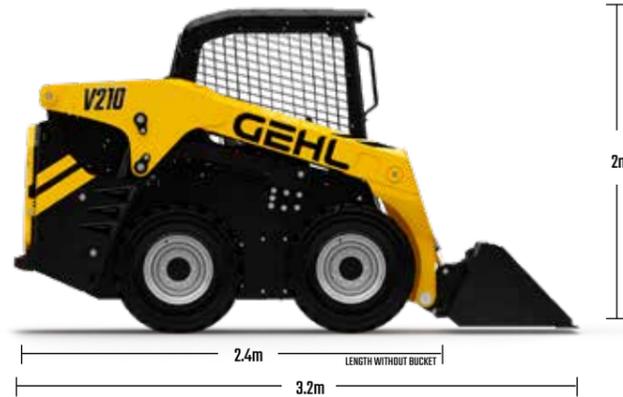

CONTROL TYPES

STANDARD



JOYSTICK

Does your daily grind involve uneven terrain, demanding conditions, and unpredictable weather? Look no further than the mid-sized V210, a vertical lift Skid Loader completely redesigned to keep moving through thick and thin. Balancing power and maneuverability in a single machine, this durable and capable Skid Loader boasts 2,100lbs. of rated operating capacity—add an optional counterweight to lift even more. Its small frame and highly durable tires make space-constrained worksites a breeze to navigate, keeping you working and focused on the task at hand. This sturdy, multi-purpose machine tackles daily tasks with ease and ensures you're ready to adapt to whatever challenges come your way.

952 kg
OPERATING CAPACITY
[AT 50% TIPPING LOAD]

3.06 m
HEIGHT TO HINGE PIN
[FULLY RAISED]

**VERTICAL
LIFT**

V230

CONTROL TYPES

STANDARD




JOYSTICK

From construction sites to residential work, the medium-frame V230 vertical lift Skid Loader balances maneuverability and strength in an optimized package. It's perfect for operators that demand lift power in fast-paced and constrained environments without compromising on comfort. A spacious cab with improved visibility helps you spot hazards while its simplified operator control cabin keeps you confident and prepared for the day ahead. Thanks to its centralized maintenance point located near its rear, it's top of class in service. Strong, nimble, and simple to maintain, the V230 delivers a well-rounded package that won't let you down when it matters most.

1043 kg
OPERATING CAPACITY
[AT 50% TIPPING LOAD]

3.86 m
HEIGHT TO HINGE PIN
[FULLY RAISED]

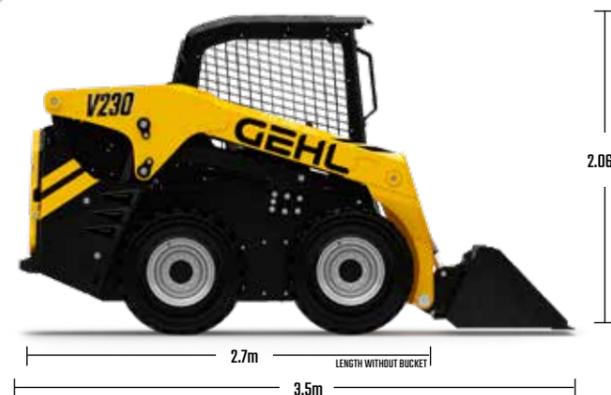

Capacities	Metric	Imperial
Operating Capacity At 50% Tipping Load	1043.26 kg	2300 lb
Operating Weight	3497 kg	7710 lb
Unladen weight	3150 kg	6945 lb
Tipping capacity	2086.53 kg	4600 lb
Weight and dimensions		
Operating Weight - Approximate	3497 kg	7710 lb
Overall Operating Height - Fully Raised	4039 mm	159 in
Height to Hinge Pin - Fully Raised	3086 mm	121 in
Overall Height to top of ROPS	2058 mm	81 in
Dump angle at full height	42 °	42 °
Dump height	2312 mm	91 in
Overall length with bucket	3589 mm	141 in
Dump reach - Full height	826 mm	33 in
Rollback Angle at Full Height	92 °	92 °
Seat to ground height	978 mm	39 in
Overall width less bucket	1707 mm	67 in
Ground clearance	203 mm	8 in
Overall length - Less Bucket	2789 mm	110 in
Clearance Radius - Front with Bucket	2171 mm	85 in
Clearance Circle - Front without Bucket	1308 mm	51 in
Clearance Circle - Rear	1689 mm	66 in
Performances		
Travel Speed with Two-Speed Option - Maximum	20 km/h	12 mph
Travel speed (unladen)	12.70 km/h	8 mph
Engine		
Engine brand	Yanmar	Yanmar
Engine model	4TNV98CT-XNGL	4TNV98CT-XNGL
Engine norm	Stage V	Stage V
Gross Power (kW)	53.70 kW	72 hp
Net Power (kW)	52.70 kW	70.7 hp
Max. torque / Engine rotation	294 Nm / 1800 rpm	217 ft/lbs / 1800 rpm
Number of cylinders	4	4
Engine cooling system	Water	Water
Battery voltage	12 V	12 V
Alternator - Ampere	100 A	100 A
Starter (kW)	3 kW	4 hp
Hydraulics		
Standard flow - Auxiliary hydraulics	86.50 l/min	23 US gpm
Auxiliary Hydraulic Pressure	239.59 bar	3475 PSI
High-Flow Auxiliary Hydraulics - Option	114 l/min	30 US gpm
High-Flow Auxiliary Hydraulics Pressure - Option	229.25 bar	3325 PSI
Tank capacities		
Fuel tank	106 l	28 US gal
Displacement	3.30 l	0.87 US gal
Coolant system capacity	18 l	5 US gal

VERTICAL LIFT



V275

Capacities	Metric	Imperial
Operating Capacity At 50% Tipping Load	1247.37 kg	2750 lb
Operating Weight	3774 kg	8320 lb
Unladen weight	3426 kg	7553 lb
Tipping capacity	2495 kg	5501 lb
Weight and dimensions		
Operating Weight - Approximate	3774 kg	8320 lb
Overall Operating Height - Fully Raised	4252 mm	167 in
Height to Hinge Pin - Fully Raised	3277 mm	129 in
Overall Height to top of ROPS	2058 mm	81 in
Dump angle at full height	42 °	42 °
Dump height	2489 mm	98 in
Overall length with bucket	3810 mm	150 in
Dump reach - Full height	830 mm	33 in
Rollback Angle at Full Height	92 °	92 °
Seat to ground height	978 mm	39 in
Overall width less bucket	1712 mm	67 in
Ground clearance	216 mm	9 in
Overall length - Less Bucket	3023 mm	119 in
Clearance Radius - Front with Bucket	2289 mm	90 in
Clearance Circle - Front without Bucket	1410 mm	56 in
Clearance Circle - Rear	1829 mm	72 in
Performances		
Travel Speed with Two-Speed Option - Maximum	17.50 km/h	11 mph
Travel speed (unladen)	11.40 km/h	7 mph
Engine		
Engine brand	Yanmar	Yanmar
Engine model	4TNV98CT-XNGL	4TNV98CT-XNGL
Engine norm	Stage V	Stage V
Gross Power (kW)	53.70 kW	72 hp
Net Power (kW)	52.70 kW	70.7 hp
Max. torque / Engine rotation	294 Nm / 1800 rpm	217 ft/lbs / 1800 rpm
Number of cylinders	4	4
Engine cooling system	Water	Water
Battery voltage	12 V	12 V
Alternator - Ampere	100 A	100 A
Starter (kW)	3 kW	4 hp
Hydraulics		
Standard flow - Auxiliary hydraulics	98.40 l/min	26 US gpm
Auxiliary Hydraulic Pressure	239.59 bar	3475 PSI
High-Flow Auxiliary Hydraulics - Option	126 l/min	33 US gpm
High-Flow Auxiliary Hydraulics Pressure - Option	229.25 bar	3325 PSI
Tank capacities		
Fuel tank	106 l	28 US gal
Reservoir Capacity Hydraulics	22.70 l	6 US gal
Displacement	3.30 l	0.87 US gal
Coolant system capacity	18 l	5 US gal



CONTROL TYPES

STANDARD



JOYSTICK

With the V275 vertical lift Skid Loader, you don't have to choose between mobility and lifting power. The powerful V275 is built for maximum maneuverability in the most confined workspaces, while offering higher dumping heights and 2,750 lbs. of rated operating capacity. From construction sites to road-building projects, this machine moves with ease from task to task. Intuitive controls enable precision movement and a spacious cab with improved visibility helps you keep tabs on the ground and surrounding environment. Plus, its centralized maintenance point keeps you working for longer by reducing service time and labor. You don't have to compromise on strength or mobility – the V275 is proof that you can have it all and in one machine.

1179 kg
OPERATING CAPACITY
[AT 50% TIPPING LOAD]

3.1 m
HEIGHT TO HINGE PIN
[FULLY RAISED]

1.8 m
BUCKET WIDTH
[STANDARD]

**VERTICAL
LIFT**



V330 GEN-2

CONTROL TYPES

OPTIONAL



DUAL-HAND



JOYSTICK

Job-tested for the most demanding environments, the V330 Skid Loader is a true workhorse. With enhanced visibility to help operators spot potential hazards and an intuitive, ergonomic cabin that enables precision maneuvering, this machine can help your operations overcome day-to-day challenges. And if loading trucks is part of your daily grind, the V330 gives you impressive reach at full height for material handling. From construction site to the farm to the lumber yard, it's time to make your own path with a machine that's strong, durable, and capable — a machine that works like you.

1497 kg
OPERATING CAPACITY
[AT 50% TIPPING LOAD]

3.3 m
HEIGHT TO HINGE PIN
[FULLY RAISED]

1.9 m
BUCKET WIDTH
[STANDARD]



Capacities	Metric	Imperial
Rated Operating Capacity	1497 kg	3300 lb
Unladen weight	4123 kg	9090 lb
Weight and dimensions		
Overall Operating Height - Fully Raised	4369 mm	172 in
Height to Hinge Pin - Fully Raised	3332 mm	131 in
Overall Height to Top of ROPS	2083 mm	82 in
Dump angle at full height	42 °	42 °
Dump height	2502 mm	99 in
Overall length with bucket	3874 mm	153 in
Dump reach - Full height	813 mm	32 in
Rollback at ground	29 °	29 °
Seat to ground height	1041 mm	41 in
Wheelbase	1257 mm	49 in
Overall width less bucket	1819 mm	72 in
Bucket Width	1880 mm	74 in
Ground clearance	229 mm	9 in
Overall length - Less Bucket	3023 mm	119 in
Clearance Radius - Front with Bucket	2400 mm	94 in
Clearance Circle - Front without Bucket	1422 mm	56 in
Clearance Circle - Rear	1765 mm	69 in
Performances		
Travel Speed with Two-Speed Option - Maximum	20.10 km/h	12 mph
Travel speed (unladen)	13.50 km/h	8 mph
Wheels		
Standard tires	14.00x17.5 HD	14.00x17.5 HD
Engine		
Engine brand	Yanmar	Yanmar
Engine model	4TNV98CT Stage V	4TNV98CT Stage V
Engine norm	Stage V	Stage V
Gross Power (kW)	53.70 kW	72 hp
Net Power (kW)	52.70 kW	70.7 hp
Max. torque / Engine rotation	294.20 Nm / 1625 rpm	217 ft/lbs / 1625 rpm
Battery	12 V	12 V
Starter (kW)	3 kW	4 hp
Hydraulics		
Standard flow - Auxiliary hydraulics	89 l/min	24 US gpm
High-Flow Auxiliary Hydraulics - Option	132 l/min	35 US gpm
Tank capacities		
Fuel tank	92.70 l	24 US gal
Reservoir Capacity Hydraulics	40 l	11 US gal
Displacement	3.30 l	0.87 US gal
Noise and vibration		
Environmental noise (LwA)	101 dB	101 dB
Whole-Body Vibration (ISO 2631-1)	1.07 m/s ²	1.07 m/s ²
Vibration to whole hand/arm	< 1.50 m/s ²	< 1.50 m/s ²

MAXIMIZE YOUR MACHINE



Scan with your phone to learn more and see a video overview.

EQUIPMENT TRACKING

Geolocation, geofencing, hours of use, etc. You are in charge of defining when and where your machine can be operated. If it is stolen or used without authorization, you are notified immediately. Location, alerts, fuel consumption at your fingertips. Knowing your machine better, you can optimize how it is used and driven, improving financial and logistics management. Save time and enjoy a greater peace of mind.

PREDICTIVE ANALYTICS

By accessing machine data, our technicians can anticipate routine maintenance operations and repairs with the needed parts, meaning issues are resolved quicker. By anticipating the maintenance operations that need to be performed, ensuring your machine is serviced at the most suitable time. The risk of unexpected breakdowns and downtime are substantially reduced.

A TRUE PARTNER

With the network of GEHL partners by your side, you can work in complete confidence and count on high-level support and practical help at any moment. Monitoring of machine events enables you to implement corrective actions and optimize your up-time while also helping you understand your total cost of ownership. If the machine is sold, you can also pass on its "ID card" to the new owner as a gesture of transparency.

STAY CONNECTED NO MATTER WHERE YOU ARE

Connected Machine

Connected Machines provide instant remote access to recent activity, operation codes, CAN data and service alerts. With data management software, end-users and owners can be more proactive with machine maintenance and benefit from additional security features such as GEO fencing and access keypads.



FULL SUPPORT

With over 160 years of experience in the field of handling equipment, our priority at GEHL is to keep your machine operating at maximum productivity. It's a mission realized through constantly refined services and innovations. Precision engineered spare parts. Qualified technicians, certified at our state-of-the-art training center. And advances like real-time equipment monitoring, at your fingertips. Maximize uptime and longevity with genuine Manitou Group parts, maintain productivity and enhance security with real-time monitoring and access control and enjoy ultimate peace of mind with extended protection coverage.

MANITOU GROUP | ATTACHMENTS

MANITOU GROUP | PARTS

MANITOU GROUP | FINANCE

ALL NEW GEHL.COM



CHEK OUT THE NEW [GEHL.COM](https://www.gehl.com)

- SHOP MACHINES
- COMPARE MODELS
- FIND A DEALER
- LOCATE SUPPORT
- WORKING PHOTOS/VIDEOS

Also linked to our social media pages allowing you to join the conversation with other GEHL machine enthusiasts.



FROM YOUR COMPUTER
OR YOUR PHONE!

GEHL[®]

WORKS LIKE YOU[™]

GEHL.COM



Manitou Equipment America, LLC

P.O. Box 179



One GEHL Way



West Bend, WI, USA 53095



P: (262) 334-9461

F: (262) 338-7517

Manitou Group reminds users to read and understand the operator's manual before operating any equipment. Also, make sure all safety devices and shields are in place and functioning properly. Manitou Group reserves the right to add improvements or make changes in specifications at any time without notice or obligation.

© 2023 Manitou Equipment America, LLC. All registered and unregistered marks are owned by Manitou Equipment America, LLC or its affiliates. All rights reserved.

® denotes registration in the United States. Trademarks may or may not be registered in other countries.