

DOOSAN

Mini Excavators |
DX35Z



Maximum power: 24.8 hp
Operating weight: 3.499 t
Max. bucket capacity: 0.11 m³



Doosan DX35Z high-performance hydraulic excavator

■ A model with novel features

Developed with the concept of 'providing optimum value to the end-user', the DX35Z (zero tail swing) hydraulic excavator offers additional value to the operator. In concrete terms, this translates into:

- Increased production and improved fuel economy achieved with the electronic optimization of the hydraulic system and the new generation engine
- Improved ergonomics, increased comfort and excellent all-round visibility, ensuring a safe and pleasant working environment
- High-performance materials, combined with new methods of structural stress analysis, have improved reliability and increased component life expectancy, thus reducing running costs
- Reduced maintenance increases the availability and lowers the operating costs of the excavator



The highest performance is guaranteed in all working conditions

The advanced hydraulic system, combined with a powerful engine, provides the biggest break-out and tractive forces for efficient operation. As a result, the DX35Z delivers outstanding performance, work efficiency, and the ability to adapt to any work environment.

Engine speed lever

The conveniently located engine speed lever allows easy engine control.

Kubota D1703-M-D1-E4B-BC-2 engine

The DX35Z has a powerful and eco-friendly heart, which always provides high operating efficiency and pleasant working conditions.

Powerful digging force (bucket)

Powerful, efficient, and with increased digging force with standard arm. Bucket digging force: 20790 N

Dozer blade

Welded, unitized blade provides durability even under harsh working conditions. Automatically controlled blade floating for quick and easy performance of leveling operations.

Boom swing

The boom swing function allows you to work in very narrow areas.

Second speed, auto-shift and auto-idle

The travel motors automatically return to high speed after downshifting under load. This allows smoother turns and easier dozing work. Auto-idle is available as an option to reduce fuel consumption.



Rear swing radius:
875 mm

Minimum front swing radius:
2267 mm



Right swing angle: 55°

Left swing angle: 75°

Slew rate: 8.6 rpm

Comfort

▣ The cab has been ergonomically designed with comfort in mind

Starting fresh, the DX35Z is the result of an innovative technical design!

The cab space is more comfortable than any other excavator in its class - and the variety of convenient features provide the operator with maximum comfort.



Comfortable sliding seat



Control stand tilting function

Comfortable operating cab

A roomy ROPS-TOPS, independent minimal shock and low noise operator's cab with safety glass provides all-round visibility. The right side window opens for ventilation and the front window slides up.

Monitor

The centralized display panel provides comprehensive information about the machine in an easy-to-read format. The high-quality display panel is waterproof and all information can be seen at a glance.

Control stand

The left and right control stands are ergonomically placed for convenient operation. The control stand surfaces have ample room to install several option switches. The uni-body plastic design provides the operator with a spacious and comfortable cab environment.

Joystick

The hydraulic joystick levers have very comfortable grips that allow the operator to perform precise operations very easily.

Thumb control for boom swing and auxiliary hydraulics

A thumb control is integrated in the joystick for better metering of the boom swing and the proportional auxiliary hydraulics.

Suspension seat

A fully adjustable suspension seat provides operator comfort during long working days.

Cup holder

The conveniently located cup holder adds to the operator's comfort.

Air conditioning

The Doosan advanced climate control system keeps you comfortable even in extreme weather conditions. The heat and air-conditioning vents allow you to direct airflow where you need it most.

Transportability

Easy to transport with the new integrated upper-structure tie-down points.



Maintenance

▣ Simple and easy

The status and condition of all components can be seen at a glance. The convenient and easy serviceability is really impressive. The most advanced technology developed by Doosan Infracore Co., Ltd. was integrated into the DX35Z excavator for powerful performance and simple, easy maintenance. This provides the operator with convenient maintenance check points and maximizes the DX35Z's work efficiency.



Easy maintenance

Access to the various coolers is very easy, making cleaning more convenient. The washer fluid level can be checked easily.

Air breather

The hydraulic system was designed to prevent the pump from cavitating.

Strengthened boom

Using finite elements and 3-dimensional computer simulation, the shape of the boom has been optimally designed for better load distribution throughout the structure. This enhancement, combined with increased material thickness, limit element fatigue for improved durability and reliability.

Engine room

The engine compartment is designed for easier service, and the sturdy sound-proofing inside the engine cover reduces the noise to provide a more comfortable environment for the operator and those working around the machine.

Oil gauge

Hydraulic oil level can be easily checked through the gauge on the side of the hydraulic tank.

Grease piping

Integrated grease piping is designed for easy maintenance of the swing bearing and boom swing cylinder.

Rubber tracks

The rubber tracks offer greater non-slip and grip capabilities, and are less harmful to sidewalks and road surfaces in urban environments. These rubber shoes can be easily installed or removed with the idler, sprocket and other main parts.

External fuel cap

The external lockable fuel cap makes refueling easy and safe. For extra convenience, a warning beep sounds when the maximum fuel level has been reached.

Technical specifications

Engine

DX35Z	
Make/model	Kubota/D1703-M-D1-E4B-BC-2 Stage V
Fuel/cooling	Diesel/Liquid, forced circulation
No. of cylinders	3
Piston displacement	1642 cm ³
Nominal flywheel power	18.2 kw (24.8 hp) at 2200 rpm (ISO 14396)
Max torque	97.4 Nm (SAE)
Bore × stroke	87 mm × 92.4 mm
Alternator	12 V / 90 Ah

Fluid capacities

DX35Z	
Cooling system (radiator capacity)	8 l
Engine lubrication plus oil filter	5.2 l
Fuel tank	52 l
Hydraulic tank	8.3 l
Hydraulic system	39.7 l
Final drive case (each)	0.5 l

Environment

Noise levels comply with environmental regulations (dynamic values).

Noise emission & vibration

DX35Z	
Noise level LpA (EU Directive 2006/42/EC)	77 dB(A)
Noise level LwA (EU Directive 2006/14/EC)	94 dB(A)
Whole body vibration (ISO 2631-1)	0.11 ms ⁻²
Hand-arm vibration (ISO 5349-1)	0.34 ms ⁻²

Undercarriage

Tractor-type undercarriage. Heavy-duty track frame, all welded stress-relieved structure. Top-grade materials are used for toughness. Side frames are welded, securely and rigidly, to the track frame. Lifetime-lubricated track rollers, idlers with floating seals. Hydraulic track adjusters with shock-absorbing recoil springs.

Number of rollers and track shoes

DX35Z	
Lower rollers (per side)	4
Track shoes	Rubber
Overall track length	2074 mm
Shoe width	300 mm



Hydraulic system

This original design enables both independent and combined operations of all functions, joystick control type operations.

Pump

DX35Z	
Type	Single outlet variable displacement, load sensing torque limited pump with gear pumps
Total hydraulic capacity	101.2 l/min
Auxiliary flow	63.9 l/min
Auxiliary relief	206 bar

Maximum system pressure

DX35Z	
Boom	290 bar
Arm / bucket / travel	270 bar
Swing	216 bar

Swing mechanism

High-torque, axial piston motor with planetary reduction gear bathed in oil. Swing circle is single-row, shear type ball bearing with induction-hardened internal gear. Internal gear and pinion gear immersed in lubricant. A two position swing lock secures the upper structure for transportation.

Swing system

DX35Z	
Boom swing, left	75°
Boom swing, right	55°
Slew rate	8.6 rpm

Drive

Each track is driven by an independent, high-torque, axial piston motor through planetary reduction gears. Two control levers provide smooth travel or counter-rotation upon demand.

Speed & traction

DX35Z	
Travel speed (low - high)	2.6 - 4.7 km/h
Traction force	3480 kgf
Gradeability	30°

Digging forces (ISO 6015)

At power boost.

DX35Z	
Digging force, standard arm (ISO 6015)	20790 N
Digging force, long arm (ISO 6015)	18010 N
Digging force, bucket (ISO 6015)	33430 N
Drawbar pull	34132 N

Weight

DX35Z	
Operating weight with cab and bucket (ISO 6016)	3499 kg
Ground pressure with rubber tracks	0.33 kgf/cm ²
Transport mass (no attachment)	3335 kg
Weight reduction with canopy	-118 kg
Additional weight for cab with HVAC	19 kg
Additional weight for steel tracks	96 kg
Additional weight for long arm	12 kg
Additional weight for heavy counterweight	291 kg

Lifting capacities

DX35Z

Standard arm • standard counterweight • w/o bucket


Unit: kg	A		2.0 m		3.0 m		4.0 m		Max. reach	
	B	Chassis Frame Attachment								
Boom: 2405 mm Arm: 1200 mm Shoe: 300 mm	4.0 m	Dozer Up								
		Dozer Down								
	3.0 m	Dozer Up							323	325
		Dozer Down							702*	
	2.0 m	Dozer Up			507	498	320	317	266	257
		Dozer Down			869*		759*		759*	
	1.0 m	Dozer Up			466	458	303	299	247	241
		Dozer Down			1224*		883*		816*	
	0.0 m	Dozer Up	821	821	444	431	297	289	259	250
		Dozer Down	2017*		1487*		1007*		928*	
	-1.0 m	Dozer Up	900	900	456	441			314	302
		Dozer Down	2283*		1401*				965*	

Standard arm • heavy counterweight • w/o bucket

Unit: kg	A		2.0 m		3.0 m		4.0 m		Max. reach	
	B	Chassis Frame Attachment								
Boom: 2405 mm Arm: 1200 mm Shoe: 300 mm	4.0 m	Dozer Up								
		Dozer Down								
	3.0 m	Dozer Up							433	433
		Dozer Down							702*	
	2.0 m	Dozer Up			666	651	429	422	362	351
		Dozer Down			869*		759*		759*	
	1.0 m	Dozer Up			625	611	412	405	340	332
		Dozer Down			1224*		883*		816*	
	0.0 m	Dozer Up	1115	1047	603	584	406	395	355	344
		Dozer Down	2283*		1487*		1007*		928*	
	-1.0 m	Dozer Up	1194	1128	615	594			425	410
		Dozer Down	2283*		1401*				965*	

Long arm • heavy counterweight • w/o bucket

Unit: kg	A		2.0 m		3.0 m		4.0 m		Max. reach	
	B	Chassis Frame Attachment								
Boom: 2405 mm Arm: 1330 mm Shoe: 300 mm	4.0 m	Dozer Up							602*	602*
		Dozer Down							602*	
	3.0 m	Dozer Up					552	552	491	473
		Dozer Down					612*		638*	
	2.0 m	Dozer Up			705*	705*	559	532	422	410
		Dozer Down			705*		679*		680*	
	1.0 m	Dozer Up			820	780	542	516	401	387
		Dozer Down			1126*		831*		726*	
	0.0 m	Dozer Up	1455	1293	797	743	530	494	415	395
		Dozer Down	2272*		1448*		980*		787*	
	-1.0 m	Dozer Up	1669	1372	819	737	528	497	482	456
		Dozer Down	2295*		1509*		961*		861*	

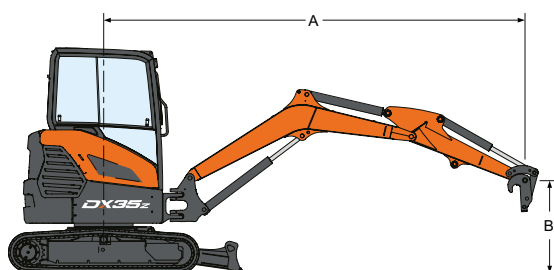


Center line of rotation

Ground level

: Over front
 : Over side or 360°

1. The nominal forces are based on the SAE J1097 standard.
2. * = The nominal loads are based on hydraulic capacity.
3. The nominal loads do not exceed 87% of the hydraulic capacity or 75% of the capacity of the swing.

Dimensions & working range

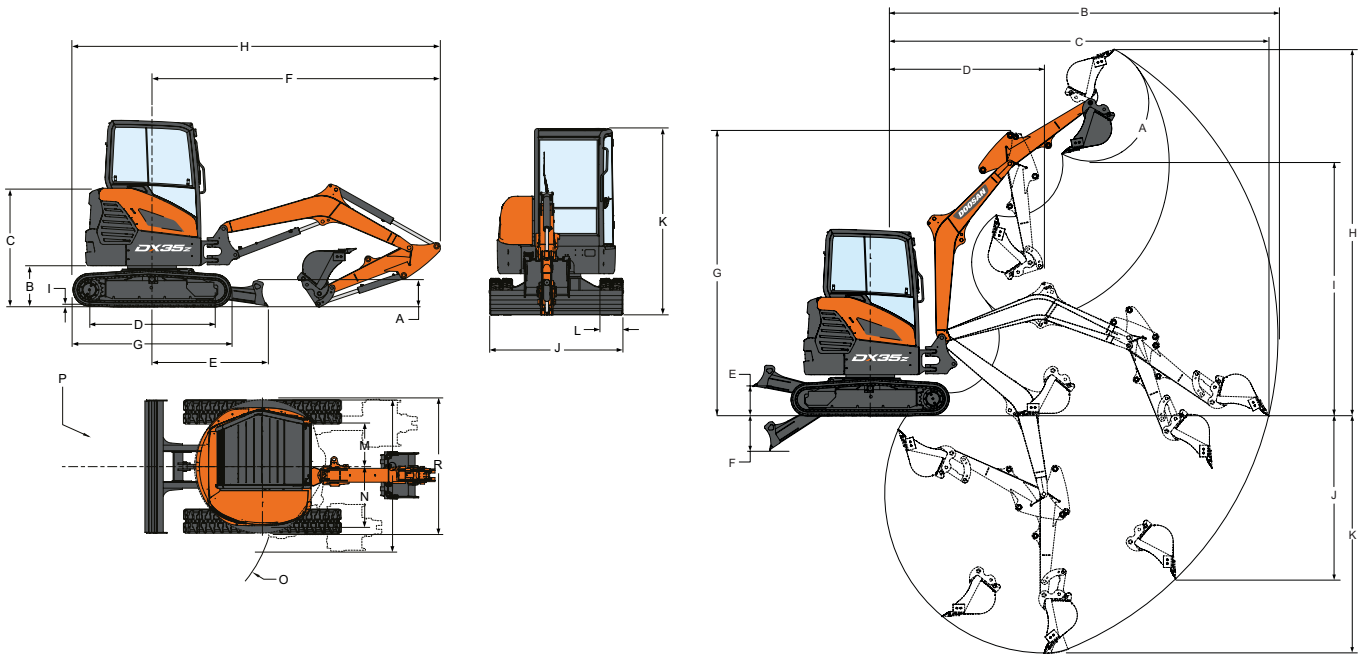

Dimensions

		DX35Z
A	Blade height	mm 322
B	Clearance under counterweight	mm 540
C	Height to top of engine cover	mm 1557
D	Tumbler distance	mm 1647
E	Center line to blade	mm 1528
F	Front length - std arm	mm 3787
F	Front length - long arm	mm 3796
G	Overall length of track assembly	mm 2074
H	Shipping length - std arm	mm 4823
H	Shipping length - long arm	mm 4832
I	Grouser height	mm 25
J	Blade width	mm 1750
K	Overall height	mm 2468
L	Track width	mm 300
M	Machine center line to working equipment center line, left-hand rotation	mm 575
N	Machine center line to working equipment center line, right-hand rotation	mm 795
O	Minimum turning radius - std arm	mm 1788
O	Minimum turning radius - long arm	mm 1841
P	Rear swing radius - std arm/std counterweight	mm 875
P	Rear swing radius - long arm/heavy counterweight	mm 965
Q	Working width at maximum right-hand rotation	mm 1841
R	Working width at maximum left-hand rotation	mm 1805

Working range

		DX35Z
A	Max. bucket angle	° 185
B	Max. forward reach - std arm	mm 5351
B	Max. forward reach - long arm	mm 5633
C	Max. digging reach - std arm	mm 5230
C	Max. digging reach - long arm	mm 5520
D	Min. front swing radius - std arm	mm 2267
D	Min. front swing radius - long arm	mm 2324
E	Blade lift height	mm 382
F	Blade cutting depth	mm 456
G	Max. height with arm retracted - std arm	mm 3708
G	Max. height with arm retracted - long arm	mm 3708
H	Max. digging height - std arm	mm 4804
H	Max. digging height - long arm	mm 4985
I	Max. dump height - std arm	mm 3340
I	Max. dump height - long arm	mm 3521
J	Max. vertical wall depth - std arm	mm 2136
J	Max. vertical wall depth - long arm	mm 2414
K	Max. digging depth - std arm	mm 3117
K	Max. digging depth - long arm	mm 3417

Standard and optional equipment

Cab & interior

Dix textile suspension seat	●
Hydraulic joystick controls	●
Proportional fingertip auxiliary and boom swing offset hydraulic control	●
Control console locks	●
Cupholder	●
Foldable and ergonomic pedals	●
Retractable seat belt	●
Air conditioning (cab with HVAC)	○
AM/FM MP3 stereo Bluetooth radio	○
TOPS/ROPS/FOPS cab with heater	○

Safety

Battery disconnect	●
Full fuel warning alarm	●
Horn	●
Engine/hydraulic monitor with shutdown	●
Upper structure four-point tie down	●
Object handling device (safety valves + overload warning device + lifteye)	○
Travel motion alarm	○

Other

1750 mm dozer blade	●
300 mm rubber tracks	●
Adjustable double acting auxiliary hydraulic (AUX 1) with quick couplers on arm with blind caps	●
Auto idle	●
Blade float feature	●
Two-speed travel with Auto shift	●
Water separator	●
Work light (boom)	●
2nd AUX hydraulics (boom, arm) on arm with blind caps	○
Additional lights (2+1)	○
Direct-to-tank-AUX1 line	○
Heavy counterweight with long arm	○

Standard: ●
Optional: ○

Some of these options may be standard in some markets. Some of these options may not be available for certain markets. Please check with your local DOOSAN dealer for more information about availability or to adapt your machine to your application needs.

