

TIMBER GRABS

PRODEM OFFER 2 STYLES OF TIMBER GRABS SUITABLE FOR MATERIAL HANDLERS AND EXCAVATORS FROM 2-65 TON OPERATING WEIGHT.

THE PRODEM TIMBER GRABS CAN BE CUSTOMISED TO SUIT YOUR APPLICATION AND REQUIREMENTS.



**RAM & CYLINDER
OVERSTROKE
PROTECTION**

Heavy duty
ram protection

ROTATION MOTOR




Fully protected
compact rotary motor,
endless hydraulic
rotation with integrated
pressure limitation

INTERLOCKING TINES


Allowing a tight clamping
of the log or trunk

**WEAR RESISTANT
QUALITY MATERIALS**

Used for maximum durability
and minimum downtime

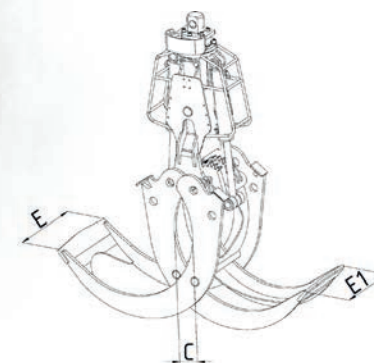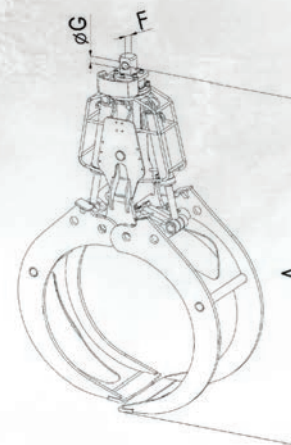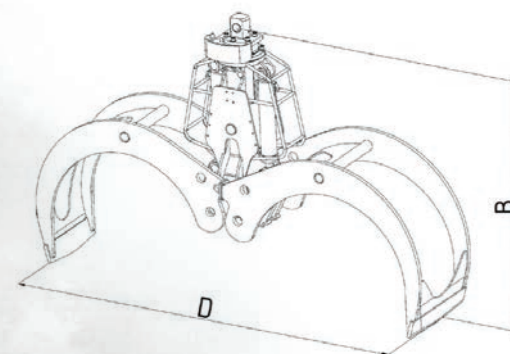

TECHNICAL SPECIFICATION

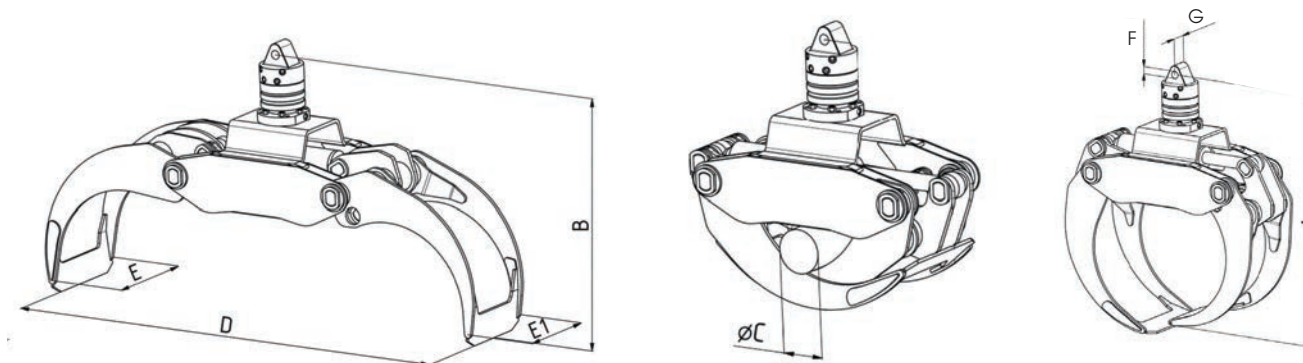

Model	Volume (m ³)	Weight (kg)	mm (E+E1)	Height A Closed mm	Height B Open mm	Min Log Dia. C mm	Max Opening D mm	Rotation Connection Width G mm	Mounting Pin Diameter F mm	Material Handler Weight Class	Excavator Weight Class (t)
TG028-L	0,28	185	335/375	1060	980	90	1280	84	30	2-7	2-7
TG035-L	0,35	235	470/520	1190	1115	100	1950	84	30	2-7	2-7
TG030	0,30	361	410/480	1315	1100	110	1890	90	40	2-7	8-14
TG040	0,40	441	460/530	1345	1130	150	2005	90	40	8-14	8-14
TG050	0,50	471	460/530	1410	1170	180	2145	90	40	8-14	8-14
TG4-500	0,5	780	520/660	2410	1960	150	1820	115	70	18-25	15-21
TG4-650	0,65	830	520/660	2490	2000	150	1950	115	70	18-25	15-21
TG4-800	0,8	900	660/860	2660	2085	200	2255	115	70	18-25	15-21
TG4.5-800	0,80	1385	840/700	2760	2095	50	2380	114	70	22-35	20-30
TG4.5-1000	1,0	1465	840/700	2830	2145	90	2515	114	70	22-35	20-30
TG4.5-1250	1,25	1515	840/700	2960	2190	110	2765	114	70	22-35	20-30
TG4.5-1500	1,5	1525	840/700	3080	2230	125	2990	114	70	22-35	20-30
TG4.5-1750	1,75	1700	840/700	3190	2240	150	3190	114	70	22-35	20-30
TG4.5-2000	2	1900	840/700	3315	2315	240	3465	114	70	22-35	20-30
TG5.5-1250	1,25	2200	840/700	3260	2460	100	3825	149	80	35-65	30-45
TG5.5-1500	1,5	2240	840/700	3385	2505	120	3055	149	80	35-65	30-45
TG5.5-1750	1,75	2300	840/700	3500	2545	140	3275	149	80	35-65	30-45
TG5.5-2000	2,0	2350	840/700	3500	2545	140	3275	149	80	35-65	30-45
TG5.5-2500	2,5	2470	840/700	3880	2675	170	4000	149	80	35-65	